

## Problem 2/143


(b11)

REPLACE 2 forces + couple  
by a force-couple sys @ A.



Step

1) Express forces in components  
Label forces to aid clarity  $\vec{F}_1$   $\vec{F}_2$

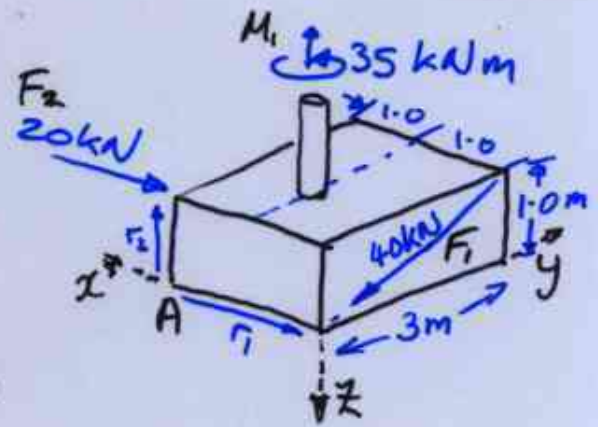

$\vec{F}_2$  is easy:  $\vec{F}_2 = -20 \text{ kN } \hat{i}$  **Note sign**

$\vec{F}_1$  needs trig:

$$\theta = \tan^{-1}\left(\frac{1.0}{3.0}\right) = 18.4^\circ$$

$$F_{1y} = (40 \text{ kN})(\cos(18.4^\circ)) = 37.95$$

$$F_{1z} = (40 \text{ kN})(\sin(18.4^\circ)) = 12.65 \text{ kN}$$

$$\text{So } \vec{F}_1 = -37.95 \hat{j} + 12.65 \hat{k} \text{ kN}$$

To get  $\vec{R} = \vec{F}_1 + \vec{F}_2$  ... ADD  $\Rightarrow \vec{R} = -20 \hat{i} - 37.95 \hat{j} + 12.65 \hat{k}$

Now to get couple of resultant about A. kN·m

We have  $\vec{M}_1$  already:  $\vec{M}_1 = -35 \hat{k} \text{ kNm}$  **sign**

moments due to  $\vec{F}_1$  &  $\vec{F}_2$  ...

$$\vec{r}_1 \times \vec{F}_1 = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ -2 & 0 & 0 \\ 0 & -37.95 & 12.65 \end{vmatrix}$$

$$= -\hat{j}(-2)(12.65) + \hat{k}(-2)(-37.95)$$

$$\vec{r}_2 \times \vec{F}_2 = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ 0 & 0 & -1 \\ -20 & 0 & 0 \end{vmatrix}$$

$$= +20 \hat{j}$$

Sum 3 contributions (green)

$$\vec{M} = -35 \hat{k} + 20 \hat{j} + 25.3 \hat{j} + 75.9 \hat{k}$$

$$= \underline{45.3 \hat{j} + 40 \hat{k}} \quad \underline{\text{kN}\cdot\text{m}}$$